





**SUMMIT COUNTY STANDARD NOTES FOR CONSTRUCTION PLANS:**



1. ALL WORK AND MATERIALS SHALL BE IN CONFORMANCE WITH ALL CURRENTLY APPLICABLE STANDARDS IN THE "SUMMIT COUNTY LAND USE AND DEVELOPMENT CODE."
2. LOCATIONS OF EXISTING UTILITIES SHOWN IN PLANS ARE APPROXIMATE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING ALL UNDERGROUND UTILITIES, ANY DRAINAGE FACILITIES, AND ALL RECORD DRAWINGS OF THE UTILITY OWNERS AND THE SUMMIT COUNTY ROAD AND BRIDGE DEPARTMENT.
3. THE CONTRACTOR IS REQUIRED TO HAVE A COMPLETE SET OF APPROVED ROAD AND DRAINAGE PLANS ON THE JOB SITE WHENEVER CONSTRUCTION IS IN PROGRESS.
4. IF THE CONTRACTOR DISCOVERS ANY DISCREPANCIES BETWEEN THE PLANS AND EXISTING CONDITIONS ENCOUNTERED, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE DESIGN ENGINEER AND THE SUMMIT COUNTY ENGINEERING DEPARTMENT.
5. ON-SITE GRADING SHALL BE IN ACCORDANCE WITH THE APPROVED GRADING PLAN AND EROSION CONTROL PLAN. ANY REPORT OR EXPORT OF MATERIAL SHALL BE FROM A PERMITTED SOURCE. DESTINATION AND COMMODITY WITH THE SUMMIT COUNTY ENGINEERING DEPARTMENT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS, STATE OF COLORADO WATER QUALITY/DISCHARGE PERMITS, NPRA REVIEW, TIMBER HARVEST PERMITS, ACEE PERMITS AND REQUIREMENTS, FLOOD PLANS, DESIGNATED DRAINAGEWAYS, ETC.
6. PRIOR TO SITE CONSTRUCTION, THE CONTRACTOR IS RESPONSIBLE FOR LOCATING UNDERGROUND UTILITIES. CALL THE UNDERGROUND UTILITY LOCATION SERVICE AT 811 BEFORE YOU DIG.

**SUMMIT COUNTY, COLORADO EROSION/SEDIMENTATION CONTROL (ESC) NOTES:**




1. THE MOST EFFECTIVE ESC BEST MANAGEMENT PRACTICE (BMP) IS NON-DISTURBANCE. GIVEN THE NATURE OF THE PROJECT, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS, STATE OF COLORADO WATER QUALITY/DISCHARGE PERMITS, NPRA REVIEW, TIMBER HARVEST PERMITS, ACEE PERMITS AND REQUIREMENTS, FLOOD PLANS, DESIGNATED DRAINAGEWAYS, ETC.
2. EROSION CONTROL BMP'S AS SHOWN HEREON AND INDICATED ON YOUR SITE PLAN MUST BE INSTALLED AND APPROVED PRIOR TO ISSUANCE OF A GRADING PERMIT, INCLUDING YOUR VTC AND CONCRETE WASHOUT AREA.
3. THE CONTRACTOR SHALL DO NO CLEARING AND GRUBBING OR EARTHWORK BEFORE THE EROSION CONTROL INSTALLATIONS HAVE BEEN APPROVED BY THE COUNTY ENGINEER.
4. EROSION CONTROL INSTALLATIONS HAVE BEEN APPROVED BY THE COUNTY ENGINEER. MAY REQUIRE THE CONTRACTOR TO PERFORM TEMPORARY WORK ITEMS INCLUDING BUT NOT LIMITED TO:
  - A. INSTALLING DITCHES, BERM, CULVERTS, AND OTHER MEASURES TO CONTROL.
  - B. SURFACE WATER SETTLING BASINS, ENERGY DISSIPATORS, AND OTHER MEASURES TO CONTROL DOWNSTREAM FLOWS.
  - C. COVERING OR OTHERWISE PROTECTING SLOPES UNTIL PERMANENT EROSION CONTROL MEASURES ARE WORKING.
5. THE CONTRACTOR SHALL BEAR FULL RESPONSIBILITY FOR TEMPORARY WATER POLLUTION CONTROL. IN ALL SOURCES OF POLLUTION, POLLUTANTS SHALL BE CAPTURED, STORED, OR OTHERWISE DISPERSED INTO DOWNSTREAM WATERS WITHOUT APPROPRIATE CONTROLS AND REQUIRED PERMITS.
6. APPROVAL OF THE ESC PLAN DOES NOT CONSTITUTE APPROVAL OF ANY OF THE PROPOSED PAVEMENT, STORM, DRAINAGE, GRADING, OR UTILITY DESIGN ELEMENTS SHOWN ON THE ESC PLAN.
7. THE EROSION/SEDIMENTATION CONTROL MEASURES SHOWN ARE THE MINIMUM REQUIREMENTS FOR THE ANTICIPATED SITE CONDITIONS. THE CONTRACTOR SHALL INSPECT AND MAINTAIN THESE ESC MEASURES DAILY, AND SHALL MAINTAIN AND UPGRADE THESE MEASURES AS NECESSARY TO PREVENT SEDIMENT-LADEN WATER FROM ENTERING FLOWING OFF THE SITE. PERMITTED STORM DRAINAGE FACILITIES, SUCH AS DIRT WELLS, CULVERTS, OR GRAVEL CHALLENGES.
8. THE CONTRACTOR/DEVELOPER IS RESPONSIBLE FOR INSTALLING ROCK CONSTRUCTION ENTRIES AT ANY & ALL LOCATIONS USED TO ENTER OR EXIT THE PROJECT SITE. THESE MUST BE INSPECTED AND APPROVED ALONG WITH OTHER BMP'S USED AT YOUR SITE, AND SHALL BE REMOVED BEFORE PAVING ROAD SURFACE.
9. THE CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLATION, INSPECTION AND MAINTENANCE OF ALL TEMPORARY EROSION CONTROL MEASURES.
10. SEDIMENT BARRIERS SHALL BE INSPECTED, CLEANED AND REPAIRED AFTER EACH RAINFALL EVENT. REMOVE ALL SEDIMENT AND DEPOSIT ON SITE AFTER SEDIMENT BARRIERS ARE NO LONGER REQUIRED.
11. CONTRACTOR SHALL NOT REMOVE TEMPORARY ESC MEASURES UNTIL 30 DAYS AFTER THE SITE IS STABILIZED. ALL DISTURBED SOIL SHALL BE PERMANENTLY STABILIZED EITHER THROUGH REVEGETATION, RP-RAP, PAVING, OR OTHER PRE-APPROVED METHODS.
12. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CLEANING DIRT, MUD AND OTHER CONSTRUCTION DEBRIS WHICH MAY ACCUMULATE ON PAVED STREETS ADJACENT TO THE CONSTRUCTION SITE. DEBRIS SHALL BE REMOVED TO A NEAREST STREET OR DRAINAGE FACILITY USING WATER UNDER PRESSURE. SWEEPING AND WATER SHALL BE USED WHEN WATER PRESSURE ALONE WILL NOT WASH THE CONSTRUCTION DEBRIS FROM THE STREET.
13. GEOTEXTILE FABRIC IS TO BE PLACED ON RIMS OF DRYWELLS, CATCH BASINS, & INLETS UNTIL SUCH TIME THE VEGETATION ON THE SITE IS ESTABLISHED & THREAT OF SEDIMENT DEPOSITION INTO THE DRAINAGE SYSTEM IS MITIGATED.

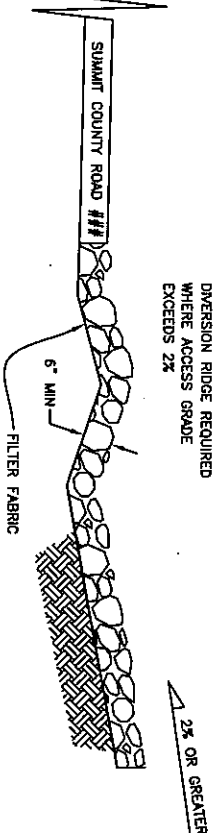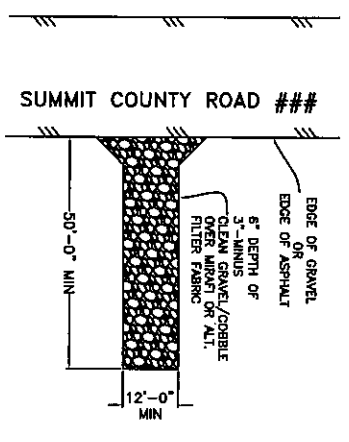

**VEHICLE TRACKING CONTROLS (VTC)**

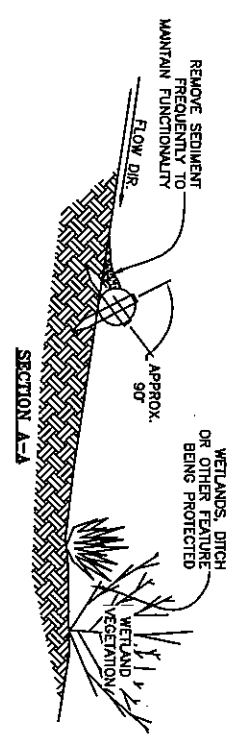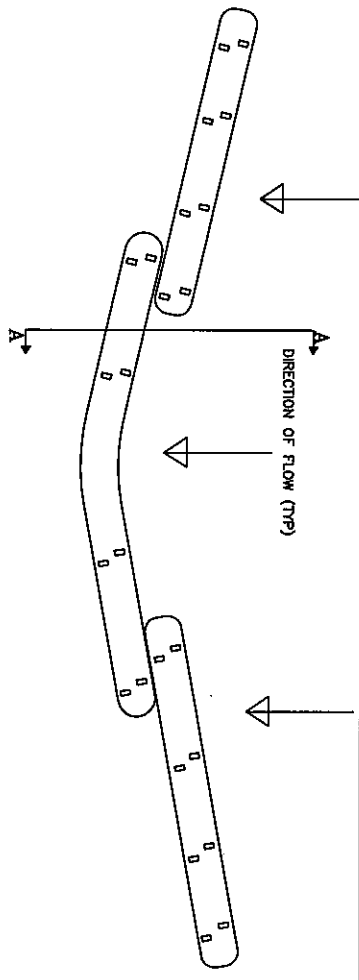

**EROSION LOG DETAIL AKA STRAW WATTLE**

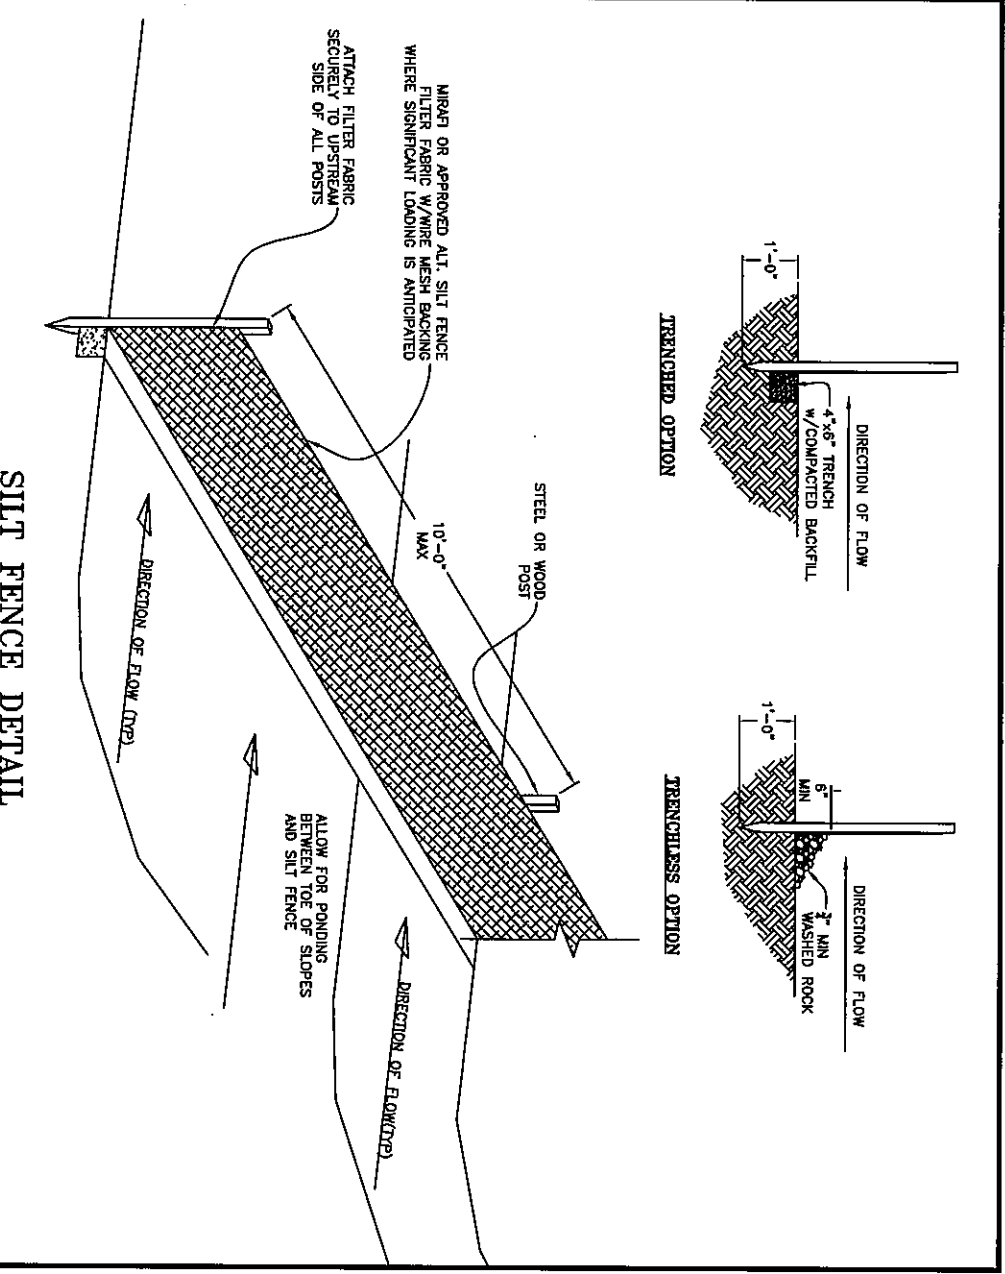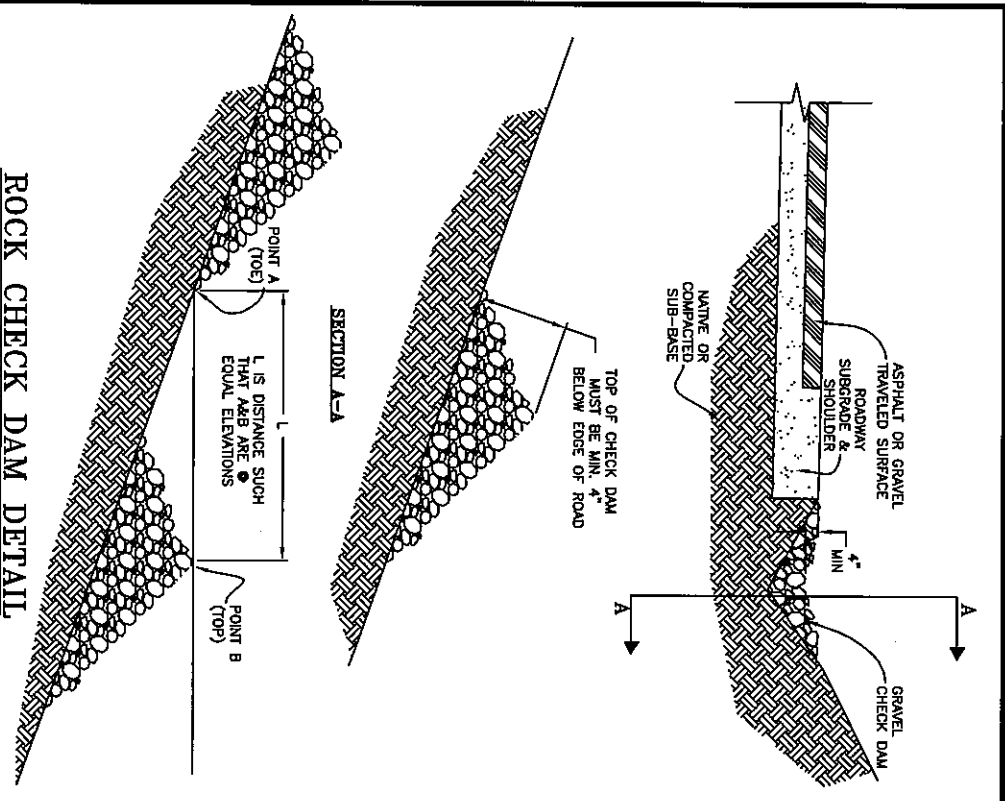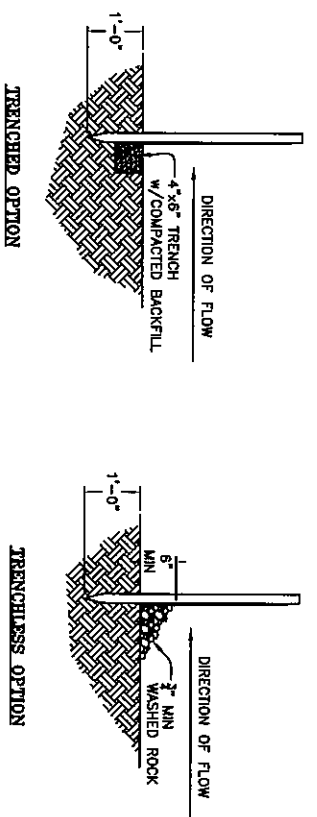

**BEFORE YOU DIG CALL 811 ONE CALL NUMBER 48 HR. NOTICE REQUIRED CALL 970.668.4212 WHEN BMP'S ARE READY FOR INSPECTION PRIOR TO EXCAVATION**

Revision Description Date REV1 REV2 REV3	REVD/DATE REVD/DATE REVD/DATE	Post Office Box 5880 0037 SCR 1003 Ft. Collins, Colorado 80443 Contact: 970-658-4200 Fax 970-658-4225	Prepared by: <b>Summit County          Government;          Engineering          Department</b>
Project Info: <b>EROSION CONTROL          TYPICAL DETAILS          SUMMIT COUNTY, COLORADO</b>		Job Number: <b>OX-00X</b>	
Date: <b>2/2/09</b>		Drawing Info: <b>SUMMIT COUNTY          STANDARD BMP'S</b>	
The Sheet: <b>1</b>	Total Sheets: <b>1</b>	Horizontal Scale: <b>nts</b>	Vertical Scale: <b>nts</b>